

BASIX[®]Certificate

Building Sustainability Index www.basix.nsw.gov.au

Single Dwelling

Certificate number: 1381644S_02

This certificate confirms that the proposed development will meet the NSW government's requirements for sustainability, if it is built in accordance with the commitments set out below. Terms used in this certificate, or in the commitments, have the meaning given by the document entitled "BASIX Definitions" dated 10/09/2020 published by the Department. This document is available at www.basix.nsw.gov.au


Secretary

Date of issue: Friday, 02 June 2023

To be valid, this certificate must be lodged within 3 months of the date of issue.



Planning,
Industry &
Environment

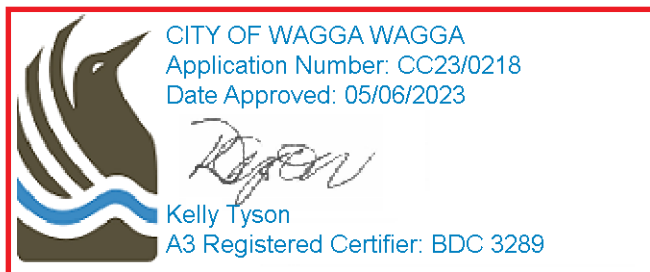

Project summary

| | |
|---------------------------|------------------------------|
| Project name | Lot 7 Munro - Plumpton Rd_02 |
| Street address | 22 PAROO Place TATTON 2650 |
| Local Government Area | Wagga Wagga City Council |
| Plan type and plan number | deposited 1291851 |
| Lot no. | 7 |
| Section no. | - |
| Project type | separate dwelling house |
| No. of bedrooms | 3 |

Project score

| | | |
|-----------------|--------|-------------|
| Water | ✓ 21 | Target 20 |
| Thermal Comfort | ✓ Pass | Target Pass |
| Energy | ✓ 40 | Target 40 |

Certificate Prepared by

Name / Company Name: Matt Jenkins Homes

ABN (if applicable): 43092585405

Description of project

Project address

| | |
|---------------------------|------------------------------|
| Project name | Lot 7 Munro - Plumpton Rd_02 |
| Street address | 22 PAROO Place TATTON 2650 |
| Local Government Area | Wagga Wagga City Council |
| Plan type and plan number | Deposited Plan 1291851 |
| Lot no. | 7 |
| Section no. | - |

Project type

| | |
|-----------------|-------------------------|
| Project type | separate dwelling house |
| No. of bedrooms | 3 |

Site details

| | |
|------------------------------------|-------|
| Site area (m ²) | 477 |
| Roof area (m ²) | 322 |
| Conditioned floor area (m2) | 176.6 |
| Unconditioned floor area (m2) | 15.4 |
| Total area of garden and lawn (m2) | 100 |

Assessor details and thermal loads

| | |
|---|-----|
| Assessor number | n/a |
| Certificate number | n/a |
| Climate zone | n/a |
| Area adjusted cooling load (MJ/m ² .year) | n/a |
| Area adjusted heating load (MJ/m ² .year) | n/a |
| Ceiling fan in at least one bedroom | n/a |
| Ceiling fan in at least one living room or other conditioned area | n/a |

Project score

| | | |
|-----------------|--------|-------------|
| Water | ✓ 21 | Target 20 |
| Thermal Comfort | ✓ Pass | Target Pass |
| Energy | ✓ 40 | Target 40 |

Schedule of BASIX commitments

The commitments set out below regulate how the proposed development is to be carried out. It is a condition of any development consent granted, or complying development certificate issued, for the proposed development, that BASIX commitments be complied with.

| Water Commitments | Show on DA plans | Show on CC/CDC plans & specs | Certifier check |
|---|------------------|------------------------------|-----------------|
| Landscape | | | |
| The applicant must plant indigenous or low water use species of vegetation throughout 30 square metres of the site. | ✓ | ✓ | |
| Fixtures | | | |
| The applicant must install showerheads with a minimum rating of 4 star (> 6 but <= 7.5 L/min plus spray force and/or coverage tests) in all showers in the development. | | ✓ | ✓ |
| The applicant must install a toilet flushing system with a minimum rating of 4 star in each toilet in the development. | | ✓ | ✓ |
| The applicant must install taps with a minimum rating of 4 star in the kitchen in the development. | | ✓ | |
| The applicant must install basin taps with a minimum rating of 4 star in each bathroom in the development. | | ✓ | |

| Thermal Comfort Commitments | Show on DA plans | Show on CC/CDC plans & specs | Certifier check |
|---|------------------|------------------------------|-----------------|
| General features | | | |
| The dwelling must not have more than 2 storeys. | ✓ | ✓ | ✓ |
| The conditioned floor area of the dwelling must not exceed 300 square metres. | ✓ | ✓ | ✓ |
| The dwelling must not contain open mezzanine area exceeding 25 square metres. | ✓ | ✓ | ✓ |
| The dwelling must not contain third level habitable attic room. | ✓ | ✓ | ✓ |
| Floor, walls and ceiling/roof | | | |
| The applicant must construct the floor(s), walls, and ceiling/roof of the dwelling in accordance with the specifications listed in the table below. | ✓ | ✓ | ✓ |

| Construction | Additional insulation required (R-Value) | Other specifications |
|---|--|---|
| floor - concrete slab on ground | nil | |
| external wall - brick veneer | 2.06 (or 2.60 including construction) | |
| external wall - framed (weatherboard, fibre cement, metal clad) | 2.20 (or 2.60 including construction) | |
| internal wall shared with garage - plasterboard | 0.84 (or 1.20 including construction) | |
| ceiling and roof - flat ceiling / pitched roof | ceiling: 3.5 (up), roof: foil/sarking | unventilated; dark (solar absorptance > 0.70) |

| | |
|------|--|
| Note | • Insulation specified in this Certificate must be installed in accordance with Part 3.12.1.1 of the Building Code of Australia. |
| Note | • In some climate zones, insulation should be installed with due consideration of condensation and associated interaction with adjoining building materials. |





















| Thermal Comfort Commitments | Show on DA plans | Show on CC/CDC plans & specs | Certifier check |
|--|------------------|------------------------------|-----------------|
| Windows, glazed doors and skylights | | | |
| The applicant must install the windows, glazed doors and shading devices described in the table below, in accordance with the specifications listed in the table. Relevant overshadowing specifications must be satisfied for each window and glazed door. | ✓ | ✓ | ✓ |
| The dwelling may have 1 skylight (<0.7 square metres) which is not listed in the table. | ✓ | ✓ | ✓ |
| <p>The following requirements must also be satisfied in relation to each window and glazed door:</p> <ul style="list-style-type: none"> For the following glass and frame types, the certifier check can be performed by visual inspection. <ul style="list-style-type: none"> Aluminium single clear Aluminium double (air) clear Timber/uPVC/fibreglass single clear Timber/uPVC/fibreglass double (air) clear | ✓ | ✓ | ✓ ✓ |
| The applicant must install the skylights described in the table below, in accordance with the specifications listed in the table. Total skylight area must not exceed 3 square metres (the 3 square metre limit does not include the optional additional skylight of less than 0.7 square metres that does not have to be listed in the table). | ✓ | ✓ | ✓ |

| Skylight no. | Maximum area (square metres) | Type | Shading device |
|--------------|------------------------------|---|----------------|
| S01 | 0.54 | aluminium, moulded plastic single clear | no shading |
| S02 | 0.54 | aluminium, moulded plastic single clear | no shading |

| Window/glazed door no. | Maximum height (mm) | Maximum width (mm) | Type | Shading Device (Dimension within 10%) | Overshadowing |
|------------------------|---------------------|--------------------|--------------------------|---|------------------|
| North facing | | | | | |
| W09 | 1810 | 2704 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| W08 | 1200 | 1810 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |

| Window/glazed door no. | Maximum height (mm) | Maximum width (mm) | Type | Shading Device (Dimension within 10%) | Overshadowing |
|------------------------|---------------------|--------------------|--------------------------|--|------------------|
| W12 | 514 | 1450 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| East facing | | | | | |
| W11 | 1200 | 1198 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| W10 | 1810 | 2704 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| D4 | 2110 | 1450 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| D3 | 2110 | 3213 | aluminium, single, clear | eave 4050 mm, 360 mm above head of window or glazed door | not overshadowed |
| South facing | | | | | |
| W01 | 1800 | 850 | aluminium, single, clear | eave 4050 mm, 360 mm above head of window or glazed door | not overshadowed |
| W13 | 1800 | 850 | aluminium, single, clear | eave 4050 mm, 360 mm above head of window or glazed door | not overshadowed |
| West facing | | | | | |
| W07 | 854 | 610 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| W04 | 1800 | 850 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| W06 | 1200 | 1450 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| W05 | 1200 | 1810 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| W03 | 1800 | 850 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |
| W02 | 1800 | 610 | aluminium, single, clear | eave 450 mm, 360 mm above head of window or glazed door | not overshadowed |

| Energy Commitments | Show on DA plans | Show on CC/CDC plans & specs | Certifier check |
|---|------------------|------------------------------|-----------------|
| Hot water | | | |
| The applicant must install the following hot water system in the development, or a system with a higher energy rating: gas instantaneous with a performance of 6 stars. | ✓ | ✓ | ✓ |
| Cooling system | | | |
| The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 living area: 3-phase airconditioning; Energy rating: EER > 4.0 | | ✓ | ✓ |
| The applicant must install the following cooling system, or a system with a higher energy rating, in at least 1 bedroom: 3-phase airconditioning; Energy rating: EER > 4.0 | | ✓ | ✓ |
| The cooling system must provide for day/night zoning between living areas and bedrooms. | | ✓ | ✓ |
| Heating system | | | |
| The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 living area: 3-phase airconditioning; Energy rating: EER > 4.0 | | ✓ | ✓ |
| The applicant must install the following heating system, or a system with a higher energy rating, in at least 1 bedroom: 3-phase airconditioning; Energy rating: EER > 4.0 | | ✓ | ✓ |
| The heating system must provide for day/night zoning between living areas and bedrooms. | | ✓ | ✓ |
| Ventilation | | | |
| The applicant must install the following exhaust systems in the development: | | | |
| At least 1 Bathroom: individual fan, ducted to façade or roof; Operation control: manual switch on/off | | ✓ | ✓ |
| Kitchen: individual fan, ducted to façade or roof; Operation control: manual switch on/off | | ✓ | ✓ |
| Laundry: natural ventilation only, or no laundry; Operation control: n/a | | ✓ | ✓ |
| Artificial lighting | | | |
| The applicant must ensure that the "primary type of artificial lighting" is fluorescent or light emitting diode (LED) lighting in each of the following rooms, and where the word "dedicated" appears, the fittings for those lights must only be capable of accepting fluorescent or light emitting diode (LED) lamps: | | | |
| <ul style="list-style-type: none"> at least 3 of the bedrooms / study; dedicated | | ✓ | ✓ |

| Energy Commitments | Show on DA plans | Show on CC/CDC plans & specs | Certifier check |
|---|---|---|---|
| <ul style="list-style-type: none"> • at least 2 of the living / dining rooms; dedicated • the kitchen; dedicated • all bathrooms/toilets; dedicated • the laundry; dedicated • all hallways; dedicated | |      |      |
| Natural lighting | | | |
| The applicant must install a window and/or skylight in the kitchen of the dwelling for natural lighting. |  |  |  |
| The applicant must install a window and/or skylight in 3 bathroom(s)/toilet(s) in the development for natural lighting. |  |  |  |
| Other | | | |
| The applicant must install a gas cooktop & electric oven in the kitchen of the dwelling. | |  | |
| The applicant must construct each refrigerator space in the development so that it is "well ventilated", as defined in the BASIX definitions. | |  | |
| The applicant must install a fixed outdoor clothes drying line as part of the development. | |  | |
| The applicant must install a fixed indoor or sheltered clothes drying line as part of the development. | |  | |

Legend

In these commitments, "applicant" means the person carrying out the development.

Commitments identified with a  in the "Show on DA plans" column must be shown on the plans accompanying the development application for the proposed development (if a development application is to be lodged for the proposed development).

Commitments identified with a  in the "Show on CC/CDC plans and specs" column must be shown in the plans and specifications accompanying the application for a construction certificate / complying development certificate for the proposed development.

Commitments identified with a  in the "Certifier check" column must be certified by a certifying authority as having been fulfilled, before a final occupation certificate (either interim or final) for the development may be issued.